Test Report

Report No.: GZEE220900345231
Date: 2022-10-11

The following sample(s) was/were submitted and identified on behalf of the client as:

Applicant:	Guangzhou Tianxin Photoeletric Co., Ltd. #15-1 JinGu Road, South,Xiutang, Huadong Town, Huadu District, Guangzhou, Guangdong, China
Manufacturer:	Same as applicant
Factory:	Same as applicant
Testing location/address:	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch 198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China
Standard(s):	IEC TR 62778: 2014 Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires
Test item description:	LED chip
Trade Mark/Brand:	
Model/Type reference:	TX-3570W15FC-NUFEZWB02DT, TX-3570W16FC120-NUFEZW-B04DT, TX-3570W21FSA3-NU3CD-01, TX-3570W30FSA3-NU4CD-01, TX-3570W30FSB3-NU4CD-02, TX-3570W30FSA3-NU4CD-03
Ratings:	MAX DC 1,9 A; 18 W; 1600 – 1900 lm; 5600 - 6000 K
Test result:	The test sample belongs to RG2 unlimited for all distances < dmin 840 mm and belongs to RG1 unlimited for all distances > dmin 840 mm.
Remark:	Throughout this report a comma is used as the decimal separator.

Alex Tan
Alex Tan
Reviewer
E&E Safety Laboratory

Junny Huang
Junny Huang
Sr Project Engineer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms ar

Copy of marking plate
N/A

Summary of testing:
Tested model TX-3570W15FC-NUFEZWB02DT for represented, due to it is the highest CCT.
The LED chip was tested under DC 1,9 A and belong to RG2 unlimited for all distances < dmin 840 mm and belongs to RG1 unlimited for all distances > dmin 840 mm according to IEC TR 62778: 2014.

Use of uncertainty of measurement for decisions on conformity (decision rule) :
No decision rule is specified by the standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Test item particulars ..... :	
Product evaluated .....:	☒ **LED package**
	☐ **LED module**
	☐ **Lamp**
	☐ **Luminaire**
Rated CCT (K).....:	6250
Rated Luminance (Mcd/m^2) .....:	
Component report data used .....:	☒ **Not applicable**
	☐ **LED package**
	☐ **LED module**
	☐ **Lamp**
	Report number:

Possible test case verdicts:

- test case does not apply to the test object :	N/A
- test object does meet the requirement ..... :	P (Pass)
- test object does not meet the requirement :	F (Fail)

Testing

Date of receipt of test item ..... :	2022-09-27
Date (s) of performance of tests ..... :	2022-09-28 to 2022-10-09

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms ar

General product information:
The LED chip can emit the white light when powered.
All models are the same except CCT.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
7	**MEASUREMENT INFORMATION FLOW**		
7.1	**Basic flow**		
	'Law of conservation of luminance' applied		N/A
	Use of only true luminance/radiance values		N/A
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	**Conditions for the radiance measurement**		
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		N/A
7.3	**Special cases (I): Replacement by a lamp or LED module of another type**		
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	**Special cases (II): Arrays and clusters of primary light sources**		
	LED package is evaluated as ..... :	☐ RG0 unlimited ☐ RG1 unlimited	N/A
	E_{thr} of LED package applies to array		N/A
8	**RISK GROUP CLASSIFICATION**		**P**
	Risk group achieved:		N/A
	- ..Risk Group 0 unlimited		N/A
	- ..Risk Group 1 unlimited		N/A
	- E_{thr} ..... (lx) : Distance to reach RG1..... (mm) :	861,61 840	P

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms ar...

	TABLE: Spectroradiometric measurement		
	Measurement performed on:	☒ **LED package** ☐ **LED module** ☐ **Lamp** ☐ **Luminaire**	
	Model number..... :	TX-3570W15FC-NUFEZWB02DT	
	Test voltage (V)..... :	N/A	
	Test current (mA)..... :	1900	
	Test frequency (Hz) ..... :	N/A	
	Ambient, t (C) ..... :	25	
	Measurement distance ..... :	☒ 20 cm ☐ ... cm	
	Source size ..... :	☒ Non-small ☐ Small : .... mm	
	Field of view ..... :	☐ 100 mrad ☒ 11 mrad ☐ 1,7 mrad	

Item	Symbol	Units	Result	Remark
Correlated colour temperature	CCT	K	8262	
x/y colour coordinates			0,2935 / 0,3001	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	71470	
Blue light hazard irradiance	E_B	W/m^2		
Luminance	L	cd/m^2	$6,158 \times 10^7$	
Illuminance	E	lx	14765	

Supplementary information:
The product belongs to RG2 unlimited for all distances < d_{min} 840 mm.
The product belongs to RG1 unlimited for all distances > d_{min} 840 mm.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms ar

Photo documentation:

Details of: View of the product

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom

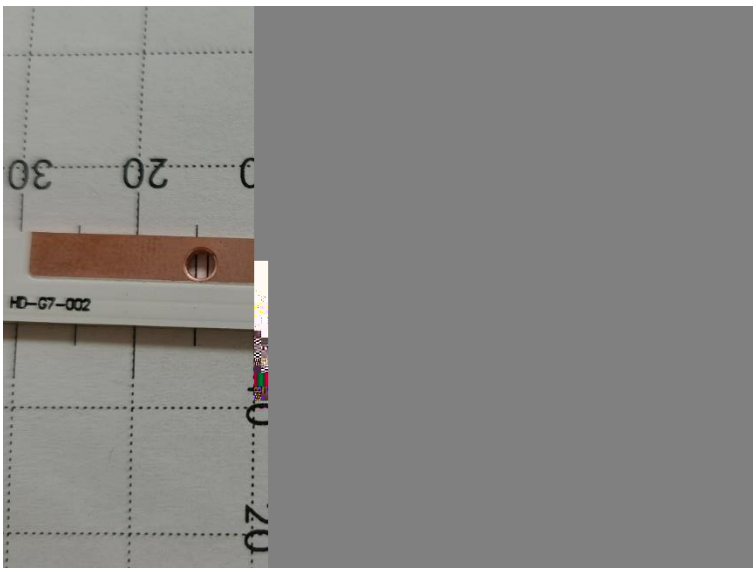

- - - End of Report - - -

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and